

# TOMCAT®

# GTX

## 24" - 34" Scrubbers



SCRUBBERS

SWEEPERS

BURNISHERS

CARPET CARE

FLOOR MACHINES





# KEY FEATURES

# APPLICATIONS



**Machine Control Panel** uses off-the-shelf toggle and marine duty switches and features universal icons which simplifies training.




**Vacuum Muffler** allows machine to consistently achieve as low as 67 dB while thoroughly drying the floor.



**EDGE Orbital Scrubhead** delivers premier chemical-free floor stripping while reducing water consumption by up to 70%.




**Squeegee Adjustments made simple** with simple wing-nuts allows for toolless maintenance of the squeegee blade.



**Fill System** features a retractable hose for easy filling on standard sink-faucets and a stainless screen for bucket filling.




**Oversized Vacuum Screen Shut-Off** quickly arrests overfill issues to protect the Vacuum Motor.



**High Performance motors and down pressure** provides an unmatched standard of cleaning.



- School Systems
- Sports Arenas
- Retail
- Food & Beverage
- Healthcare
- Grocery Stores
- Automotive
- Airports

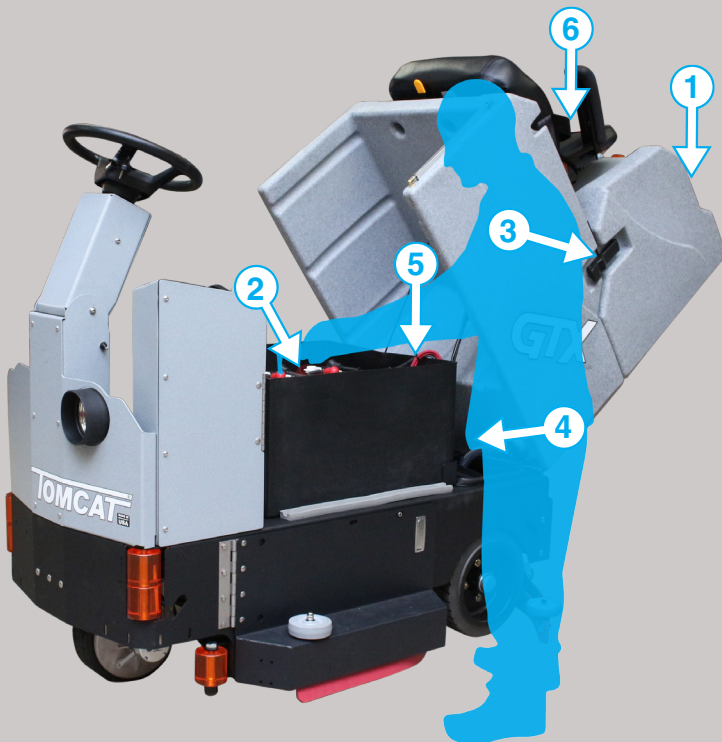



## TANKS TIP FOR ACCESS

- 1 Vacuum Screen Cleaning
- 2 Service Batteries
- 3 Solution Fill Screen
- 4 Inspect Vacuum Motor
- 5 Inline Solution Filter
- 6 Drain Saver

Reduce costly repairs associated with clogged floor drains with our Drain Saver Basket.




# VIEW INSIDE

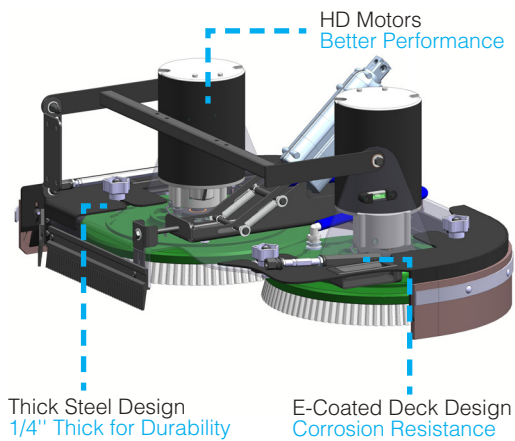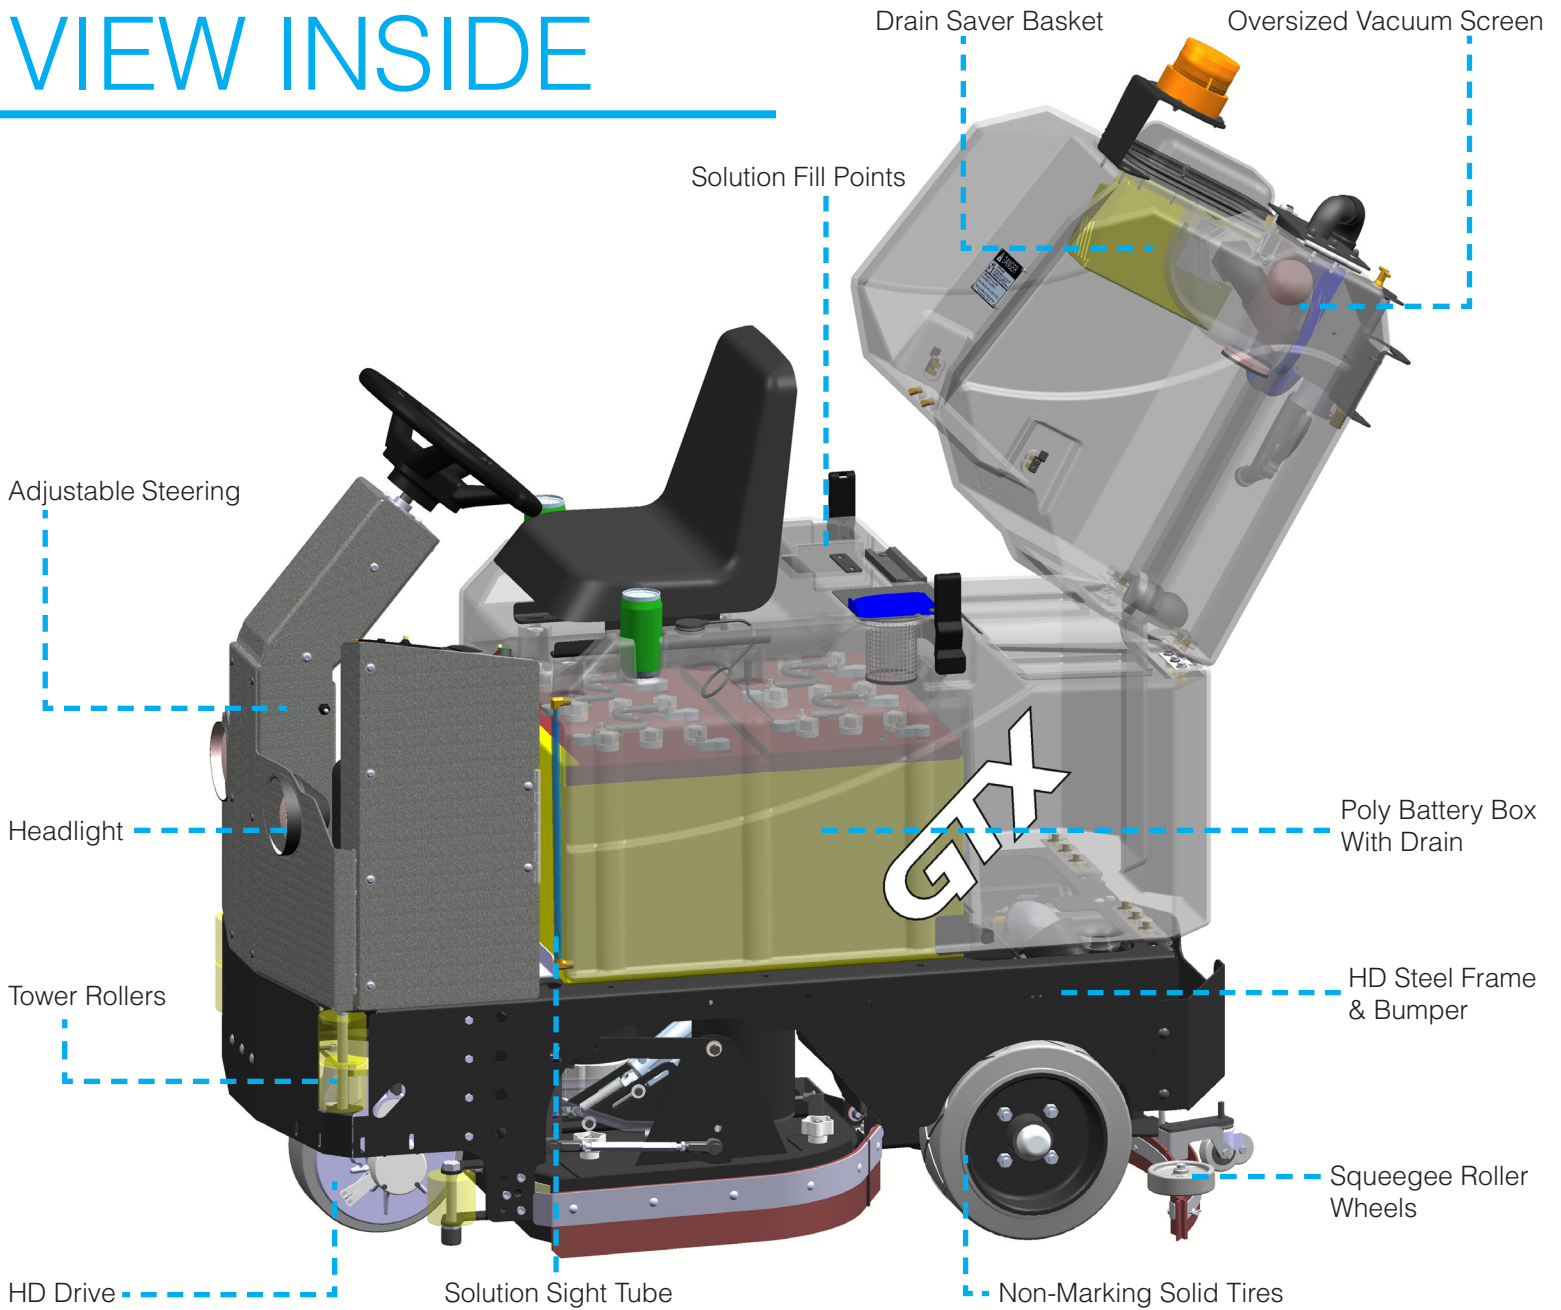


## Disk Benefits

- Brush / Pad Selection
- Lowest Maintenance Cost
- Gimballed Drivers Improves Cleaning On Irregular Floors
- Brushes Individually Driven For Unmatched Performance

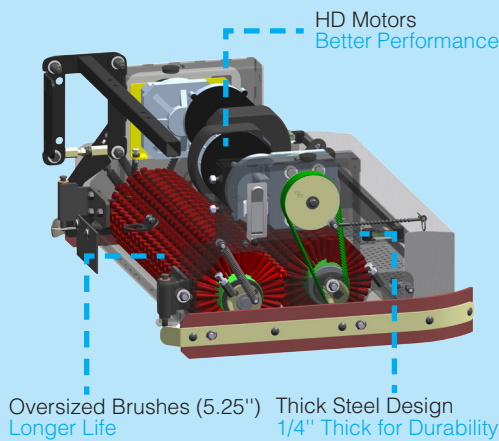

## Cylindrical Benefits

- Eliminates Dust Mopping
- Scrub & Sweep Simultaneously
- Superior Tile & Grout Cleaning

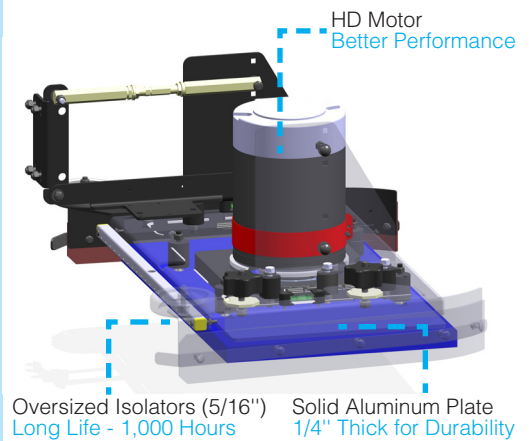

## EDGE Benefits

- Chemical Free Stripping
- Reduce Slip & Fall Potential
- Earn LEED Credits
- 70% Reduction In Water Usage
- Consistent Results - No Swirl Marks
- Wet Screens Wood Gym Floors



# CALL FOR A DEMONSTRATION



☎ 800-450-9824

🌐 (+001)-262-681-6470

🌐 [www.tomcatequip.com](http://www.tomcatequip.com)

Since 1986, our family owned company has been designing, building and supporting the best in floor maintenance equipment. Our **TOMCAT** brand services the world with unsurpassed commercial cleaning equipment, continually exceeding expectations and setting the industry bar that much higher.

We've built our reputation by providing the highest value machines and providing local support via 425 distributors in over 42 different countries.

## AUTHORIZED DISTRIBUTOR

### BODY CONSTRUCTION / DIMENSIONS

Tank Material:	Poly 3/8" (9.5 mm)
Chassis Construction:	3/16" Steel (4.8 mm) Powder Coated Steel
Front Wheel (Diameter x Width):	10" x 3" (25.4 x 7.6 cm) - Solid Black
Rear Wheels (Diameter x Width):	(2x) 12" x 5" ((2x) 30.5 x 12.7 cm) - Solid Black
Size (L x W x H):	54" x 26" x 55" (137.2 x 66 x 139.7 cm)
Weight (w/o Batteries):	755 - 805 lbs (343 - 365 kg)
Weight (w/ 245 ah Batteries):	1,195 - 1,245 lbs (542 - 565 kg)

### BRUSH / PAD SYSTEM

Disk Dimensions:	26" - (2x) 13" Diameter (66 - [2x] 33 cm)
34 Inch Deck Includes HD Side Doors	30" - (2x) 15" Diameter (76.2 - [2x] 38.1 cm)
	34" - (2x) 17" Diameter (86.4 - [2x] 43.2 cm)
Disk Motor:	(2x) 0.75 hp ((2x) 559 watts)
Disk Brush Speed:	300 rpm
Cylindrical Dimensions:	24" - (2x) 5.25" x 22" (60.9 - [2x] 13.3 x 55.8 cm)
5.25" Diameter Brush	27" - (2x) 5.25" x 25" (68.6 - [2x] 13.3 x 63.5 cm)
34 Inch Deck Includes HD Side Doors	30" - (2x) 5.25" x 28" (76.2 - [2x] 13.3 x 71.1 cm)
	34" - (2x) 5.25" x 32" (86.4 - [2x] 13.3 x 81.3 cm)

Cylindrical Motor:	(2x) 0.75 hp / 350 rpm ((2x) 559 watts)
Cylindrical Brush Speed:	750 rpm
EDGE Dimensions:	28" x 14" (71.1 x 35.6 cm)
	32" x 14" (81.3 x 35.6 cm)
EDGE Motor:	1.2 hp / 2700 rpm (894 watts)
Brush Pressure Settings:	(5) with Auto Adjust
Brush Down Pressure:	Up to 200 lbs (91 kg) / 500 lbs (227 kg) Actuator Rating

### POWER SYSTEM

System Voltage:	36 VDC
Standard Battery:	245 ah WET
Optional Battery:	325 ah WET / 360 ah WET / 250 ah AGM / 335 ah AGM
Run Time:	Up to 6.0 Hours*

\*Run times are based on continuous scrubbing run times.

Charger:	120VAC / 60 Hz Input - 36VDC / 25 amp Output
----------	--

### DRIVE SYSTEM

Power:	0.75hp - All Gear / Sealed (559 watts)
Forward Speed:	0 - 320 ft/min / 0 - 3.6 mph (0 - 98 m/min / 0 - 6 km/h)
Scrubbing Speed:	0 - 256 ft/min / 0 - 2.9 mph (0 - 78 m/min / 0 - 5 km/h)
Reverse Speed:	0 - 230 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h)

### SOLUTION / RECOVERY SYSTEMS

Solution Tank Capacity:	33 Gallons (124.9 liters) - w/ Graduated Site Tube
Solution Flow / Filter:	0 - 0.7 GPM / Stainless Inline (0 - 2.6 LPM)
Recovery Tank Capacity:	36 Gallons (136.3 liters) - 2" (5.08 cm) diameter Drain Hose
Demisting Chamber:	1.25 Gallons (4.7 liters)
Drain Saver:	30 cubic inches (492 cubic cm)
Vacuum Power:	1.0 hp / 3 Stage (740 watts)
Vacuum Specs (Water Lift / Airflow):	68" / 72 cfm (172.7 cm / 2 cm/m)
Squeegee:	Curved w/ 4-sided Rear Blade
	26D - 32" (81.3 cm)
	30D, 24C, 27C, 28E - 35" (88.9 cm)
	30C, 34D, 34C, 32E - 38" (96.5 cm)

### GENERAL

Cleaning Width:	26", 30" & 34" - Disk (66, 76.2 & 86.4 cm)
	24", 27", 30", & 34" - Cylindrical (60.9, 68.6, 76.2, 86.4 cm)
	28" & 32" - EDGE (71.1 & 81.3 cm)
Decibels:	67 dB
Productivity - Theoretical:	Up to 44,118 sqft (4,099 sqm)**
Productivity - Practical:	Up to 20,408 sqft (1,896 sqm)**

\*\*Productivity is based off of ISSA 2010 Cleaning Times

\*\*Productivity is based off of ISSA 2010 Cleaning Times



### Manufactured By

R.P.S. Corporation  
1711 South Street

Racine, Wisconsin 53404 (USA)

Phone: (800) 450-9824

International: (+001) 262-681-6470

[www.tomcatequip.com](http://www.tomcatequip.com)

Copyright R.P.S. Corporation 2017. All rights reserved. All specifications are subject to change without notice.

TC-GTX-BROCHURE (01/17)